

Rigid/Intermediate Grade Conduit Fittings Concrete Tight

Set Screw Type Fittings - Raintight (SSR Series)



SET SCREW TYPE FITTINGS - RAIN TIGHT

Applications:

Rainboot™ connectors and couplings are used with rigid conduit for IMC, steel or aluminum. Outdoors or indoors. Use Rainboot fittings for:

- Conduit systems expansion and alterations.
- Maintenance and repair operations.
- New, altered or damaged stubups.
- Connections at panels and boxes.
- Embedment in concrete.
- Installations in tight quarters: near corners, walls, ceilings, overhangs, obstacles or adjacent raceways.
- Situations where threading equipment or heavy pipe wrenches are impractical.
- Conduit systems in NEC wet locations.

Features and Benefits:


- The only line of rigid/IMC threadless fittings suitable for raintight applications.
- The only alternative to field threading in NEC wet locations.
- May be installed in any position.
- Tough and durable, long lasting, trouble free installations.
- Requires only a 3/8" wrench for installation.
- Full line – 1/2" through 2".
- Faster, easier method to install raintight rigid/IMC raceway systems.

Certifications and Compliances:

- UL 514B – Fittings for cable and conduit

Standard Materials:

- Bodies
Connectors – 1/2" – 2" steel
Couplings – 1/2" – 2" steel
- Boots – injection molded PVC attached with special epoxy.
- Setscrews hardened steel coated with special sealing resin compound.

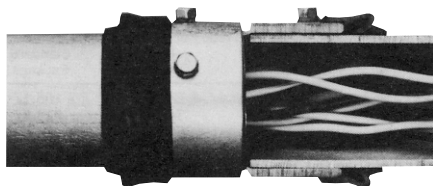

Straight Connectors – Insulated



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
SSR11	1/2"	20	20
SSR12	3/4"	20	30
SSR13	1"	20	40
SSR14	1 1/4"	5	64
SSR15	1 1/2"	5	85
SSR16	2"	4	97

Straight Connectors – Non-Insulated



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
SSR1	1/2"	20	21
SSR2	3/4"	20	23
SSR3	1"	20	40
SSR4	1 1/4"	5	64
SSR5	1 1/2"	5	85
SSR6*	2"	4	96

*Two Tightening Screws
For sealing at enclosure, use Type SG sealing gaskets

Couplings



Cat. #	Size	Unit Qty.	Wt. Lbs. Per 100
SSR21	1/2"	20	31
SSR22	3/4"	20	45
SSR23	1"	5	64
SSR24	1 1/4"	5	86
SSR25	1 1/2"	4	116
SSR26†	2"	4	165

†Four Tightening Screws

Rigid Fittings